

CUSTOMER APPROVAL:

X _____ DATE: _____

A signed approval will be required with the released order

SPECIFICATIONS:

LUMINAIRE: HOUSING AND DOOR FRAME-HEAVY WALL CAST ALUMINUM CONSTRUCTION WITH REMOVABLE BALLAST TRAY FOR EASY BALLAST ACCESS.
REFLECTOR-HEAVY WALL ALUMINUM CONSTRUCTION.

OPTICS: SEGMENTED HORIZONTAL REFLECTOR COMBINES WITH CLEAR ACRYLIC DIFFUSER TO PRODUCE TYPE III (ASYMMETRIC) LIGHT DISTRIBUTION.

LAMP HOLDER: MOGUL BASE PORCELAIN

LAMP: 150 W. H.P.S. (BY OTHERS)


BALLAST: H.P.F./C.W.A. AUTOTRANSFORMER, -20° STARTING TEMPERATURE. (MULTI-TAP VOLTAGE.)

SHAFT: ONE PIECE ROUND TAPERED, CORROSION RESISTANT, CAST ALUMINUM CONSTRUCTION. POLE SHAFT CONSISTS OF EVENLY SPACED VERTICAL FLUTES EXTENDING THE ENTIRE LENGTH OF THE SHAFT. SHAFT HAS 5¼" BUTT, TAPERING TO 3½" TOP. SHAFT IS CIRCUMFERENTIALLY WELDED TO BASE.

BASE: ONE PIECE CORROSION RESISTANT, DURABLE CAST ALUMINUM CONSTRUCTION. MINIMUM .210 WALL THICKNESS. BASE CONSISTS OF A SMOOTH, TAPERED BOTTOM SECTION, AND A HIGHLY DETAILED, DECORATIVE FLUTED SECTION, A DECORATIVE CAST ALUMINUM COLLAR AND A FLUTED HAND HOLE COVER CONTOURED TO BASE DESIGN. HAND HOLE COVER SUPPLIED WITH TAMPER RESISTANT HARDWARE. GROUNDING LUG PROVIDED INSIDE BASE OPPOSITE HAND HOLE.

ANCHORAGE: (4) 3/4"X18" FULLY GALVANIZED ANCHOR BOLTS. EACH BOLT SUPPLIED WITH TWO NUTS AND TWO WASHERS.

FINISH: POLYESTER POWDER COAT. (COLOR: BLACK.)

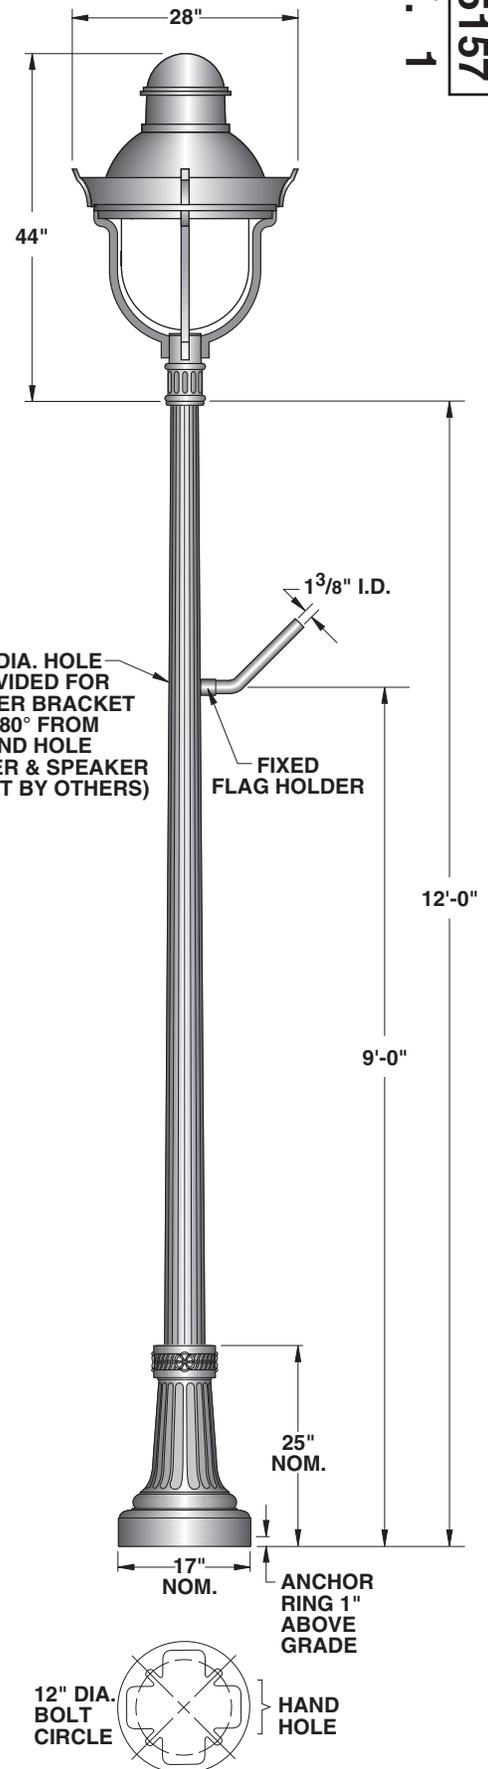

SCALE: 1/2" = 1'-0"