

Item #14:
Village Trustee Wachs
C. RPC Fire Hydrant Change Order

Site Utility Construction Inc.
P.O. Box 376
Medinah, IL. 60157
Phone: 630-372-6042

Village of Long Grove
Attn: Marc Small
Roads Commissioner/
Emergency Management Coordinator
3110 RFD
Long Grove, IL. 60047-9623

September 21, 2011

RE: Fire Hydrant Installation
SW Corner of RT 83 &
Robert Parker Coffin RD.

847-634-9440/office
847-401-2261/cell

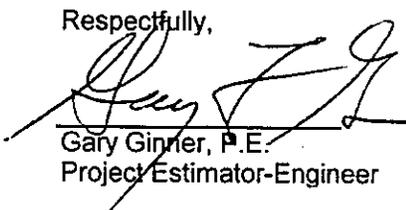
Gentleman

The site conditions are not as we originally envisioned. The point of connection is deeper than the normal 5.5 feet of cover as is located beneath an electrical conduit and 4" gas main. The 10" DIP main should be stubbed about 7-8' to the west to clear these utilities. This would shallow up the main to reduce the hydrant extension to 12". The additional costs to perform this work are as follows:

A. Material Costs		
10" DIP, CL 52	\$	620.00
10" Field Lok Gasket		160.00
12" Fire Hydrant & Valve Box Extension		325.00
B. Addition Labor & Equipment Costs		450.00
Tunnel Utilities and Extend 10" DIP		120.00
Install Hydrant Extension		
Total Additional Cost	\$	1,675.00

If you have any questions please feel free to contact me on my cell phone (630-670-2000).

Respectfully,


Gary Ginner, P.E.
Project Estimator-Engineer

Accepted By:

Printed Name:

Title: Roads Commissioner Date: 9-21-11



Marc Small



